


NOTE:

FLEXIBLE BUTYL RUBBER SEALANT EQUAL TO CONSEAL TYPE CS-302 SHALL BE USED TO: SEAL CASTING TO MANHOLE, TO SEAL ADJUSTING RINGS TOGETHER AND TO RISERS, AND TO SEAL MANHOLE RISER JOINTS. THE SEALANT MUST BE APPLIED TO THE OUTSIDE AND INSIDE HORIZONTAL PORTION OF EACH MANHOLE JOINT.

4- $\frac{3}{4}$ " ϕ EXP. ANCHORS ON 34" B.C. @ 90°

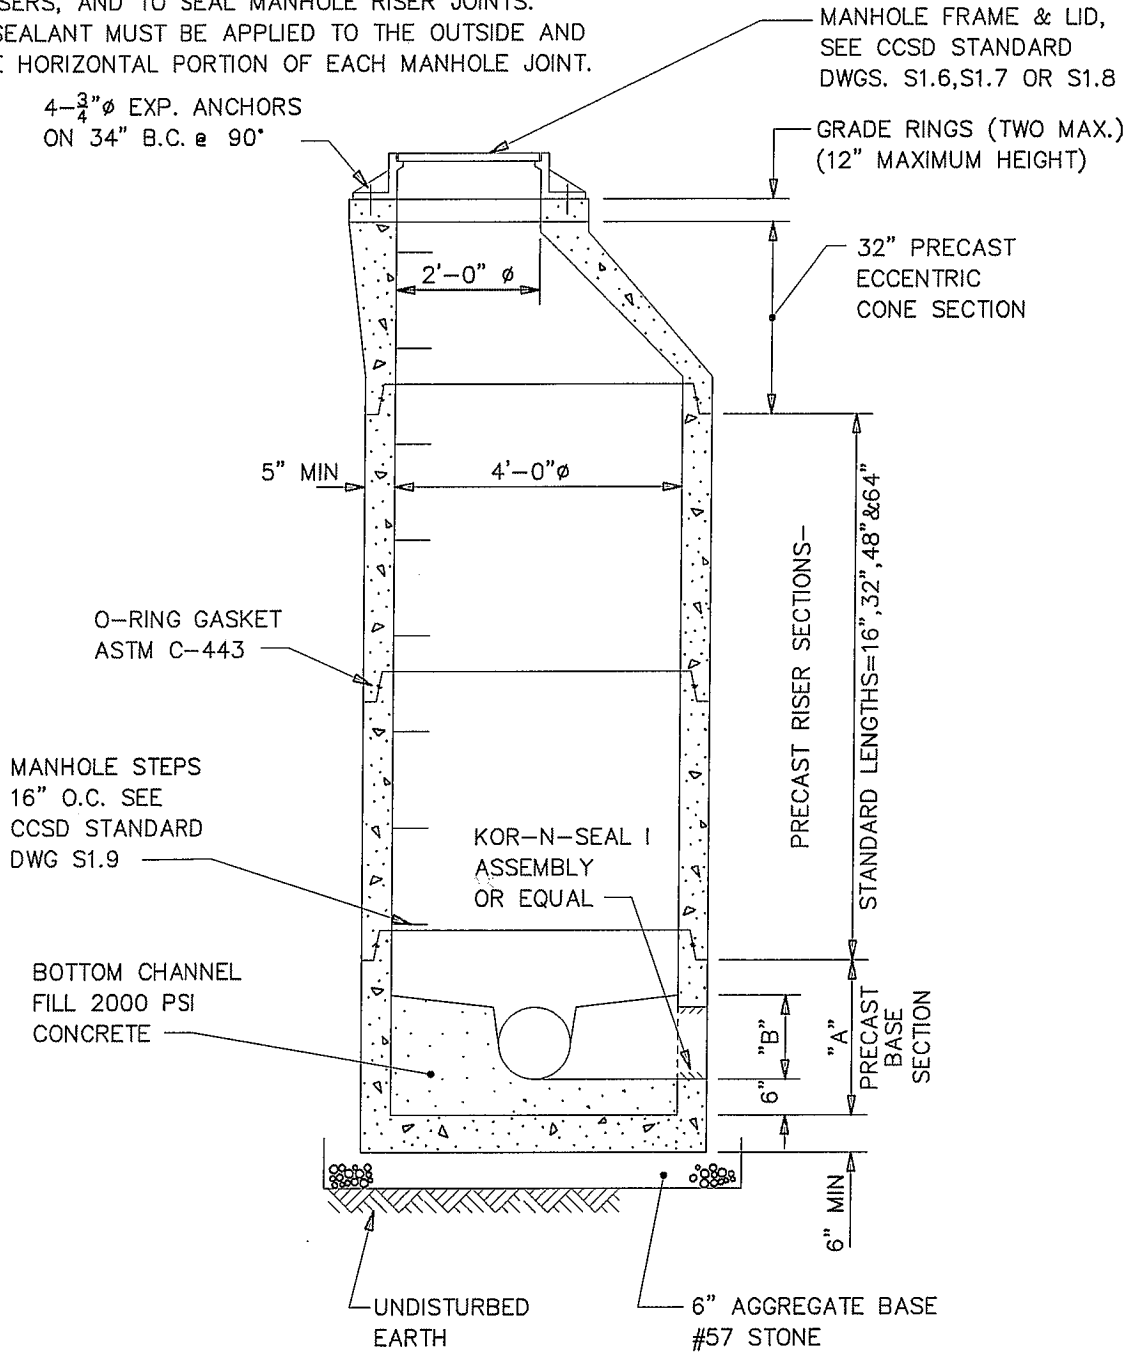

"A" DIMENSION	SEWER SIZE
24"	8" & 10"
30"	12" & 15"
38"	18"

"B" DIMENSION	SEWER SIZE
PIPE ID + 2"	8", 10" & 12"
1/2 PIPE ID + 2"	15" & LARGER

NO SCALE



CLERMONT COUNTY
SEWER DISTRICT

APPROVED _____
DATE _____

STANDARD MANHOLE
FOR SEWERS
8" TO 18"

DRAWING NO.
S1.1